
Surface mounted locks

LGKZD1

https://www.locinox.com/en-gb/gate-hardware/locks/surface-mounted-locks/d00000007

Industrial sliding gate lock with aluminium housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This is the perfect lock to provide entry to third parties like firemen or waste collectors.



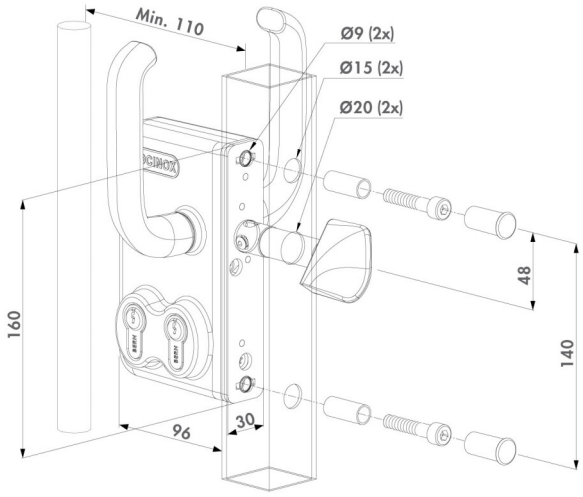

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Follower Size	Square 10 mm
Profile Type	Round
	Square
Cylinder Type	Euro Profile
Cylinder Length	54 mm
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
Hours of Salt Spray Testing	1000
Test Frequency	500000
Years of Warranty	3