LOCINOX


Surface mounted locks

LSKZU2

https://www.locinox.com/en-gb/gate-hardware/locks/surface-mounted-locks/d00000009

First-grade lock for manual sliding gates with aluminium housing and stainless steel mechanism. The unique Twistfinger and conforming self-correcting keep guarantees a perfect closing of your sliding gate. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



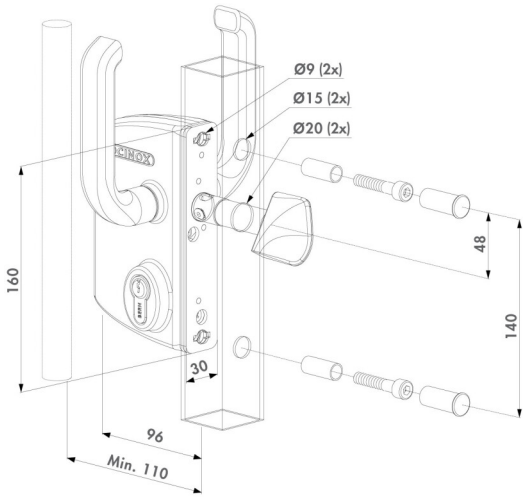

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Follower Size	Square 10 mm
Profile Type	Round
	Square
Cylinder Type	Euro Profile
Cylinder Length	54 mm
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
Hours of Salt Spray Testing	1000
Test Frequency	500000
Years of Warranty	3