
Surface mounted locks

LUKYJ5

https://www.locinox.com/en-gb/gate-hardware/locks/surface-mounted-locks/d00000010

Excellent gate lock with aluminium housing and stainless steel mechanism. Developed specifically to use with a standard 29 mm mortise cylinder. Comes standard with 5pin keyed alike or keyed different (drilled 6pin). The latch and dead bolt have 10 mm continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 23 mm guarantees secure locking. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



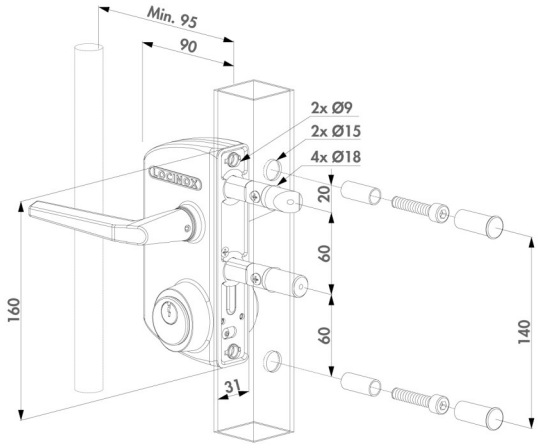

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Daybolt Adjustability	10 mm
Nightbolt Adjustability	10 mm
Key-operated Self-Latching Bolt	Yes
Throw	Nightbolt 23 mm
Follower Size	Square 8 mm
Profile Type	Flat
	Square
Cylinder Type	Mortise Profile
Cylinder Length	28,5 mm
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
Hours of Salt Spray Testing	1000
Test Frequency	500000
Years of Warranty	3