LOCINOX


For standard locks

SE

https://www.locinox.com/en-gb/gate-hardware/keeps/for-standard-locks/d00000045

Electric strike for swing gates. The strike is equipped with a blocking system that withstands 500 kg pulling force. The deadbolt receiver has been reinforced with stainless steel. This innovation makes the strike even more robust. This keep is extremely strong and the ideal solution for all your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).



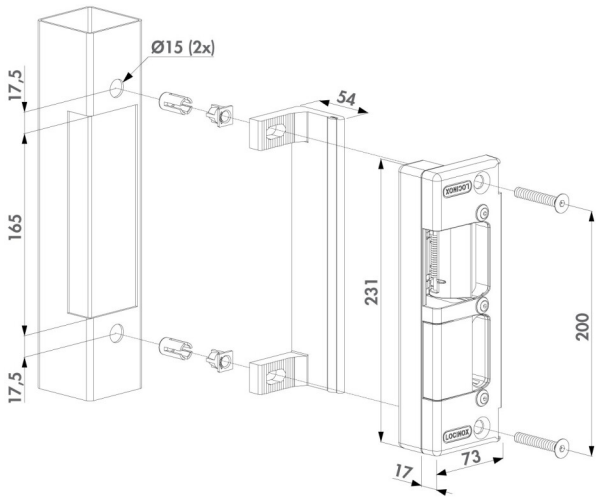

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Screws (HEX 5)
	Quick-Fix
Operating Voltage	12V AC/DC
Operating Current	Emissa 1A
	Ruptura 1,5A
Power	Emissa 12W
	Ruptura 18W
Minimal Distance Gate - Post	26 mm
IP Rating	54
Materials Main Part(s)	Powder Coated Aluminium
	Resin Encapsulated PCB
	Stainless Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	2