LOCINOX


Industrial gates

GBMU

https://www.locinox.com/en-gb/gate-hardware/hinges/industrial-gates/d00000076

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.



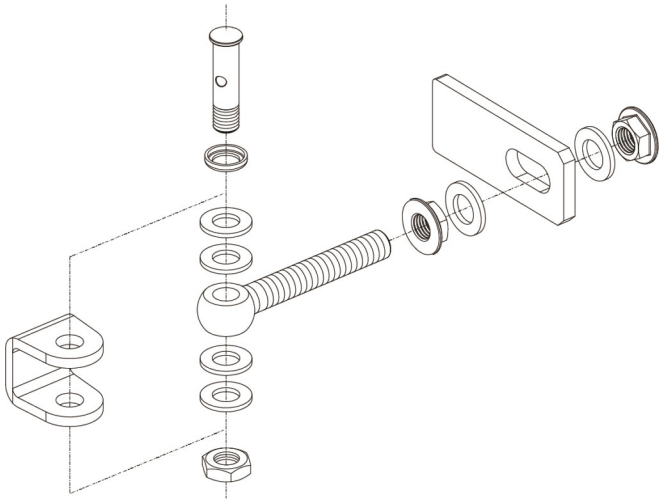

TECHNICAL SPECIFICATIONS

Minimal Distance Gate - Post	6 mm; 8 mm; 12 mm
Gate Weight	100 kg
	200 kg
	250 kg
	400 kg
	440 kg
Horizontal Adjustability	M12: 41 mm
	M16: 51/91 mm
	M18: 36/82 mm
	M20: 55/65 mm
	M22: 61/76 mm
Vertical Adjustability	x
Materials Main Part(s)	Hot Dip Galvanised Steel
	Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3