
Industrial gates

GBMU4DSHIELD

https://www.locinox.com/en-gb/gate-hardware/hinges/industrial-gates/d00000078

Vandal-proof hot-dip galvanized 180° hinge. This secured version of the GBMU4D16 hinge provides extra security since the eyebolt or cross bolt can not be tampered with. With the 4-way adjustment you no longer have to keep left or right turning gates in stock. Height & depth alignment and left/right turning direction, are individually adjustable.



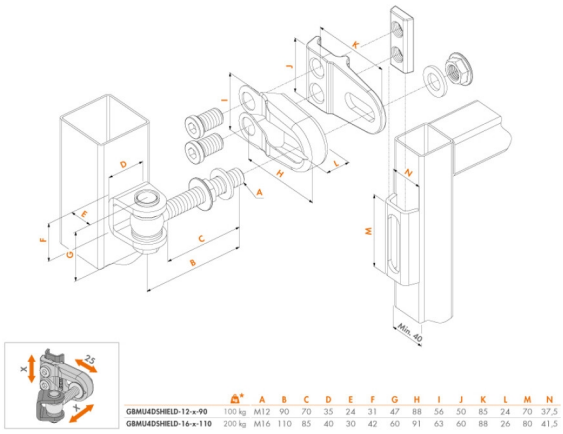

		A	B	C	D	E	F	G	H	I	J	K	L	M	N
GBMU4DSHIELD-12-x-90	100 kg	M12	90	70	35	24	31	47	88	56	50	85	24	70	37,5
GBMU4DSHIELD-16-x-110	200 kg	M16	110	85	40	30	42	60	91	63	60	88	26	80	41,5

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Minimal Distance Gate - Post	22 mm; 35 mm
Gate Weight	100 kg
	200 kg
Horizontal Adjustability	41/53 mm
Vertical Adjustability	19 mm
Materials Main Part(s)	Hot Dip Galvanised Steel
	Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3