LOCINOX


Standard code locks

LNKQ

https://www.locinox.com/en-gb/gate-hardware/locks/standard-code-locks/d00000202

With VOLTA, you can easily add access control to your gate. This solution combines a surface mounted lock with a separate keypad, connected through the gate profile. The lock seamlessly fits into the modular Locinox hole pattern. You have the option to select, modify, or delete up to 100 PIN codes.

Thanks to an energy-efficient battery set, which lasts for up to 150,000 open and close cycles in all weather conditions, there is no need for an external power supply. Available in two configurations: double with two keypads or single with one keypad and a free exit.

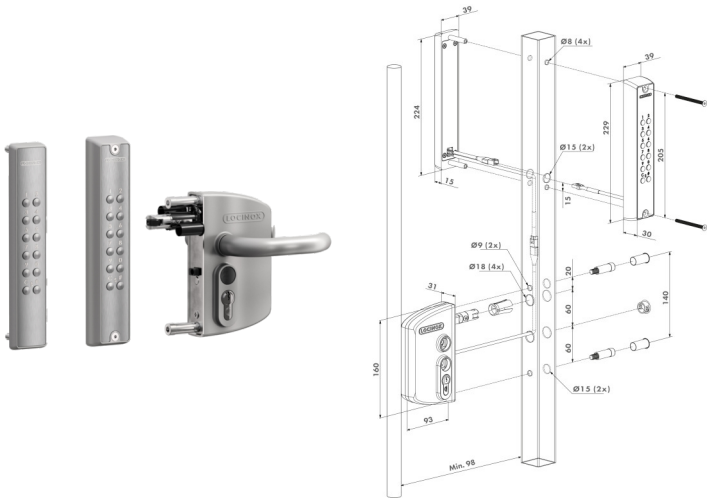

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Daybolt Adjustability	20 mm
Follower Size	Square 8 mm
Profile Type	Flat
	Round
	Square
Cylinder Type	Euro Profile
Cylinder Length	46 mm
Power	Operates on batteries, battery pack included
Gate Profile	40 ≤ x ≤ 80 mm
IP Rating	56
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
Hours of Salt Spray Testing	1000
Test Frequency	500,000 Cycles
Years of Warranty	2