
Keypads

SLIMSTONE-2

https://www.locinox.com/en-gb/access-control/keypads/p00009877

The SlimStone-2 keypad has 2 integrated relays, with a Fail Open and Fail Close contact. These make it easy to connect to Locinox and third-party automation products. This keypad with integrated LED lighting is strong and extremely weather resistant, thanks to integrated heating and IP68 waterproof rating.



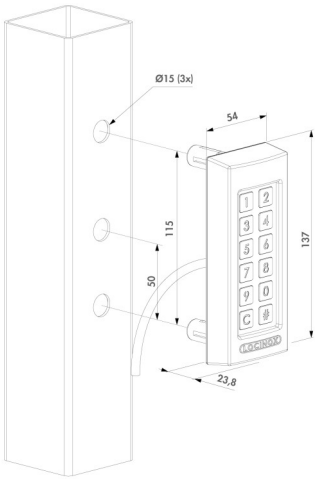

TECHNICAL SPECIFICATIONS

Installation Method	Hexagon Screws (HEX 5)
	Quick-Fix
Profile Type	Flat
	Square
Operating Voltage	10V-26V AC/DC
Operating Current	1.0A (with heating)
Power	1,5W (> 5°C) + 12W at max heating (< -25°C)
IP Rating	68
Switching Contact	2x 0-26V AC/DC - 2A
Relays	Internal
	2x COM-NO-NC
Length Provided Cable	2000 mm
Materials Main Part(s)	Powder Coated Aluminium
	Resin Encapsulated PCB
	Stainless Steel
Temperature Range	-30°C / 85°C
Norms	X
Hours of Salt Spray Testing	500
Test Frequency	1,000,000
Years of Warranty	2