LOCINOX


Insert locks

SIXTYLOCK-LS

https://www.locinox.com/en-gb/gate-hardware/locks/insert-locks/p00054686

Insert lock with stainless steel mechanism and 40 mm backset, designed for sliding gates with profiles of at least 60 mm depth. The 45 mm high Twistfinger ensures optimal locking with the SSKZ surface-mounted keep. Thanks to the patented Click-It system, installation of the SIXTYLOCK-LS in a Uniwing cut-out is fast, strong and efficient. Suitable for steel, aluminium, wooden and PVC gates.



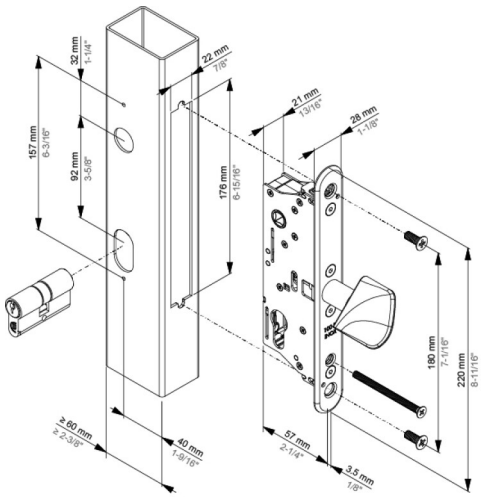

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Click-it
Key-operated Self-Latching Bolt	Yes
Follower Size	Square 8 mm
Backset	40 mm
Profile Preparation	Uniwing
Profile Type	Square
Cylinder Type	Euro Profile
Gate Profile	60 mm
Materials Main Part(s)	Stainless Steel Mechanism
Temperature Range	-30°C / 70°C
Hours of Salt Spray Testing	500
Test Frequency	500,000 Cycles
Years of Warranty	3