SCAN FOR MORE INFO




GBMU

LOCINOX®
Let's make it better together


3-way adjustable 180° hinge

ADJUSTABLE | GALVANISED | PREMIUM QUALITY

Find out more: locinox.com | help@locinox.com

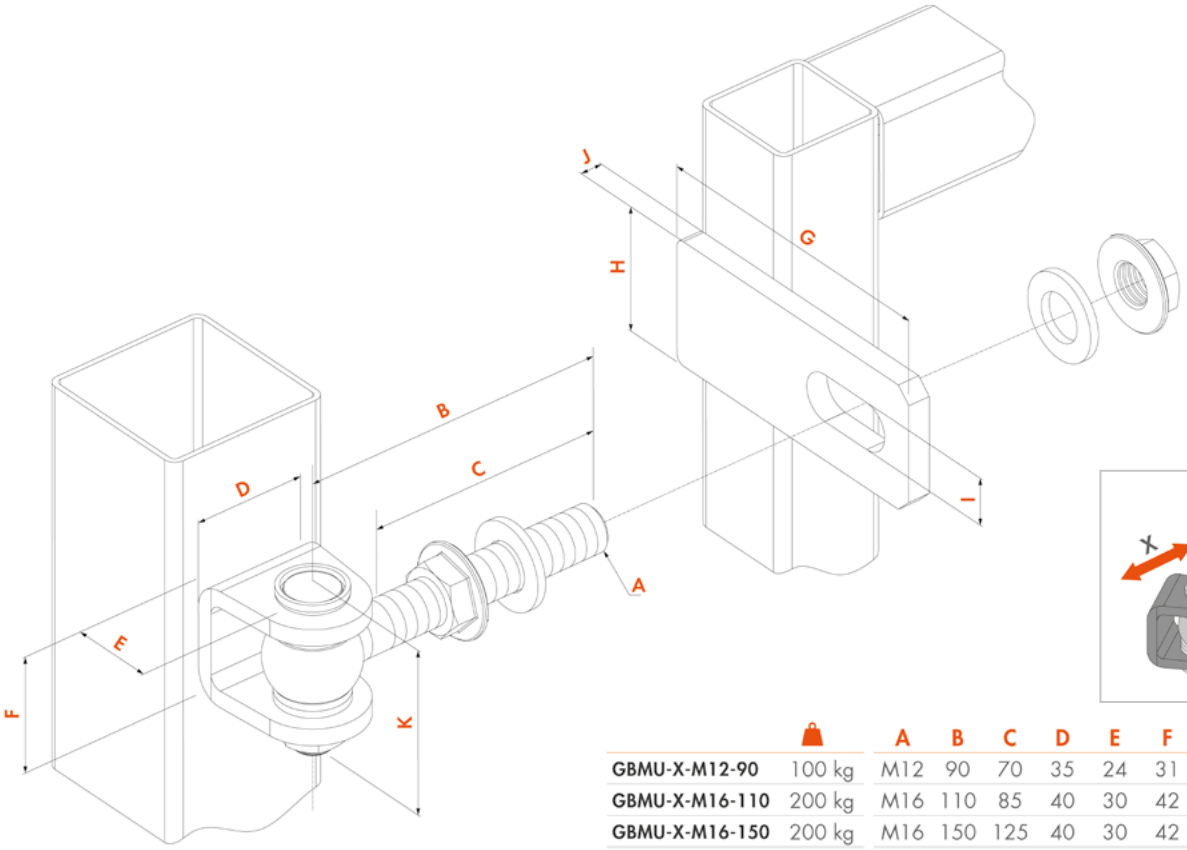

SCAN FOR MORE INFO



		A	B	C	D	E	F	G	H	I	J	K
GBMU-X-M12-90	100 kg	M12	90	70	35	24	31	90	35	13	6	47
GBMU-X-M16-110	200 kg	M16	110	85	40	30	42	110	45	17	8	60
GBMU-X-M16-150	200 kg	M16	150	125	40	30	42	110	45	17	8	60
GBMU-X-M18-105	250 kg	M18	105	80	50	30	42	120	50	19	8	62
GBMU-X-M18-150	250 kg	M18	150	125	50	30	42	120	50	19	8	62
GBMU-X-M20-130	400 kg	M20	130	105	60	35	51	130	60	21	12	72
GBMU-X-M20-150	400 kg	M20	150	115	60	35	51	130	60	21	12	72
GBMU-X-M22-145	440 kg	M22	145	115	60	35	51	130	60	23	12	74
GBMU-X-M22-160	440 kg	M22	160	130	60	35	51	130	60	23	12	74

LOCINOX®

GBMU

3-way adjustable 180° hinge

3-way adjustable hot-dip galvanised 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

Specifications

- 180° opening and closing angle
- Eyebolt, bolt & nut, hot-dip galvanised
- U-shaped ear plate and groove plate in black steel or zinc plated to weld on
- Available in M12, M16, M18, M20, M22
- Packed per 50 pieces or per pair