SCAN FOR MORE INFO



Duocyl

OUTDOOR USE | SECURE | MODULAR

Double cylinder module for insert locks

Allows unlocking the gate with two different keys from the outside. Typically, a standard key and a triangle key.


A double cylinder entrance is only required on the outside of the gate. From the inside, only one cylinder is required.

LOCINOX®

Let's make it better together

Discover more: locinox.com | help@locinox.com



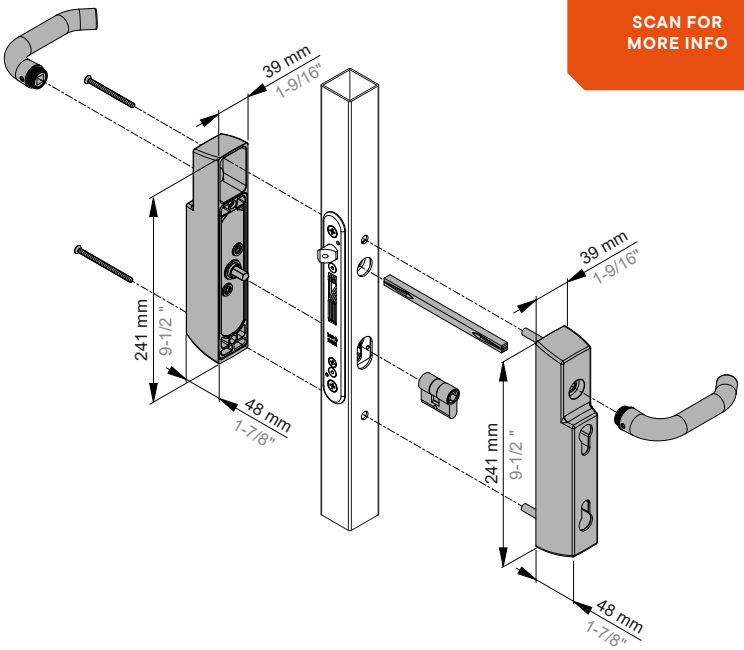

SCAN FOR MORE INFO

LOCINOX

Duocyl

Double cylinder module for insert locks

Entry for firemen, garbage housing (entrance by city personnel) 95% are industrial gates - company gates, utilities (solar or wind parks), etc.

What makes it special?

- Compatible with half Euro profile cylinders
- Suitable for left and right swinging gates
- Compatible with Locinox Uniwing insert locks: Forty, Fifty, Sixty, Seventy and Eighty
- Matching aluminium anodised handle set is included

Features

Profile preparation	Simple holes to drill using a drilling sticker
Fixation	Weldstuds + fixation bolts
Compatible with	SFKO-D(-5060), SFKU-D
Centre distance between cylinder and handle	92 mm
Spindle	8 mm
For profiles	40, 50, 60, 70 or 80 mm
Backset	20, 30, 40, 50 or 60 mm